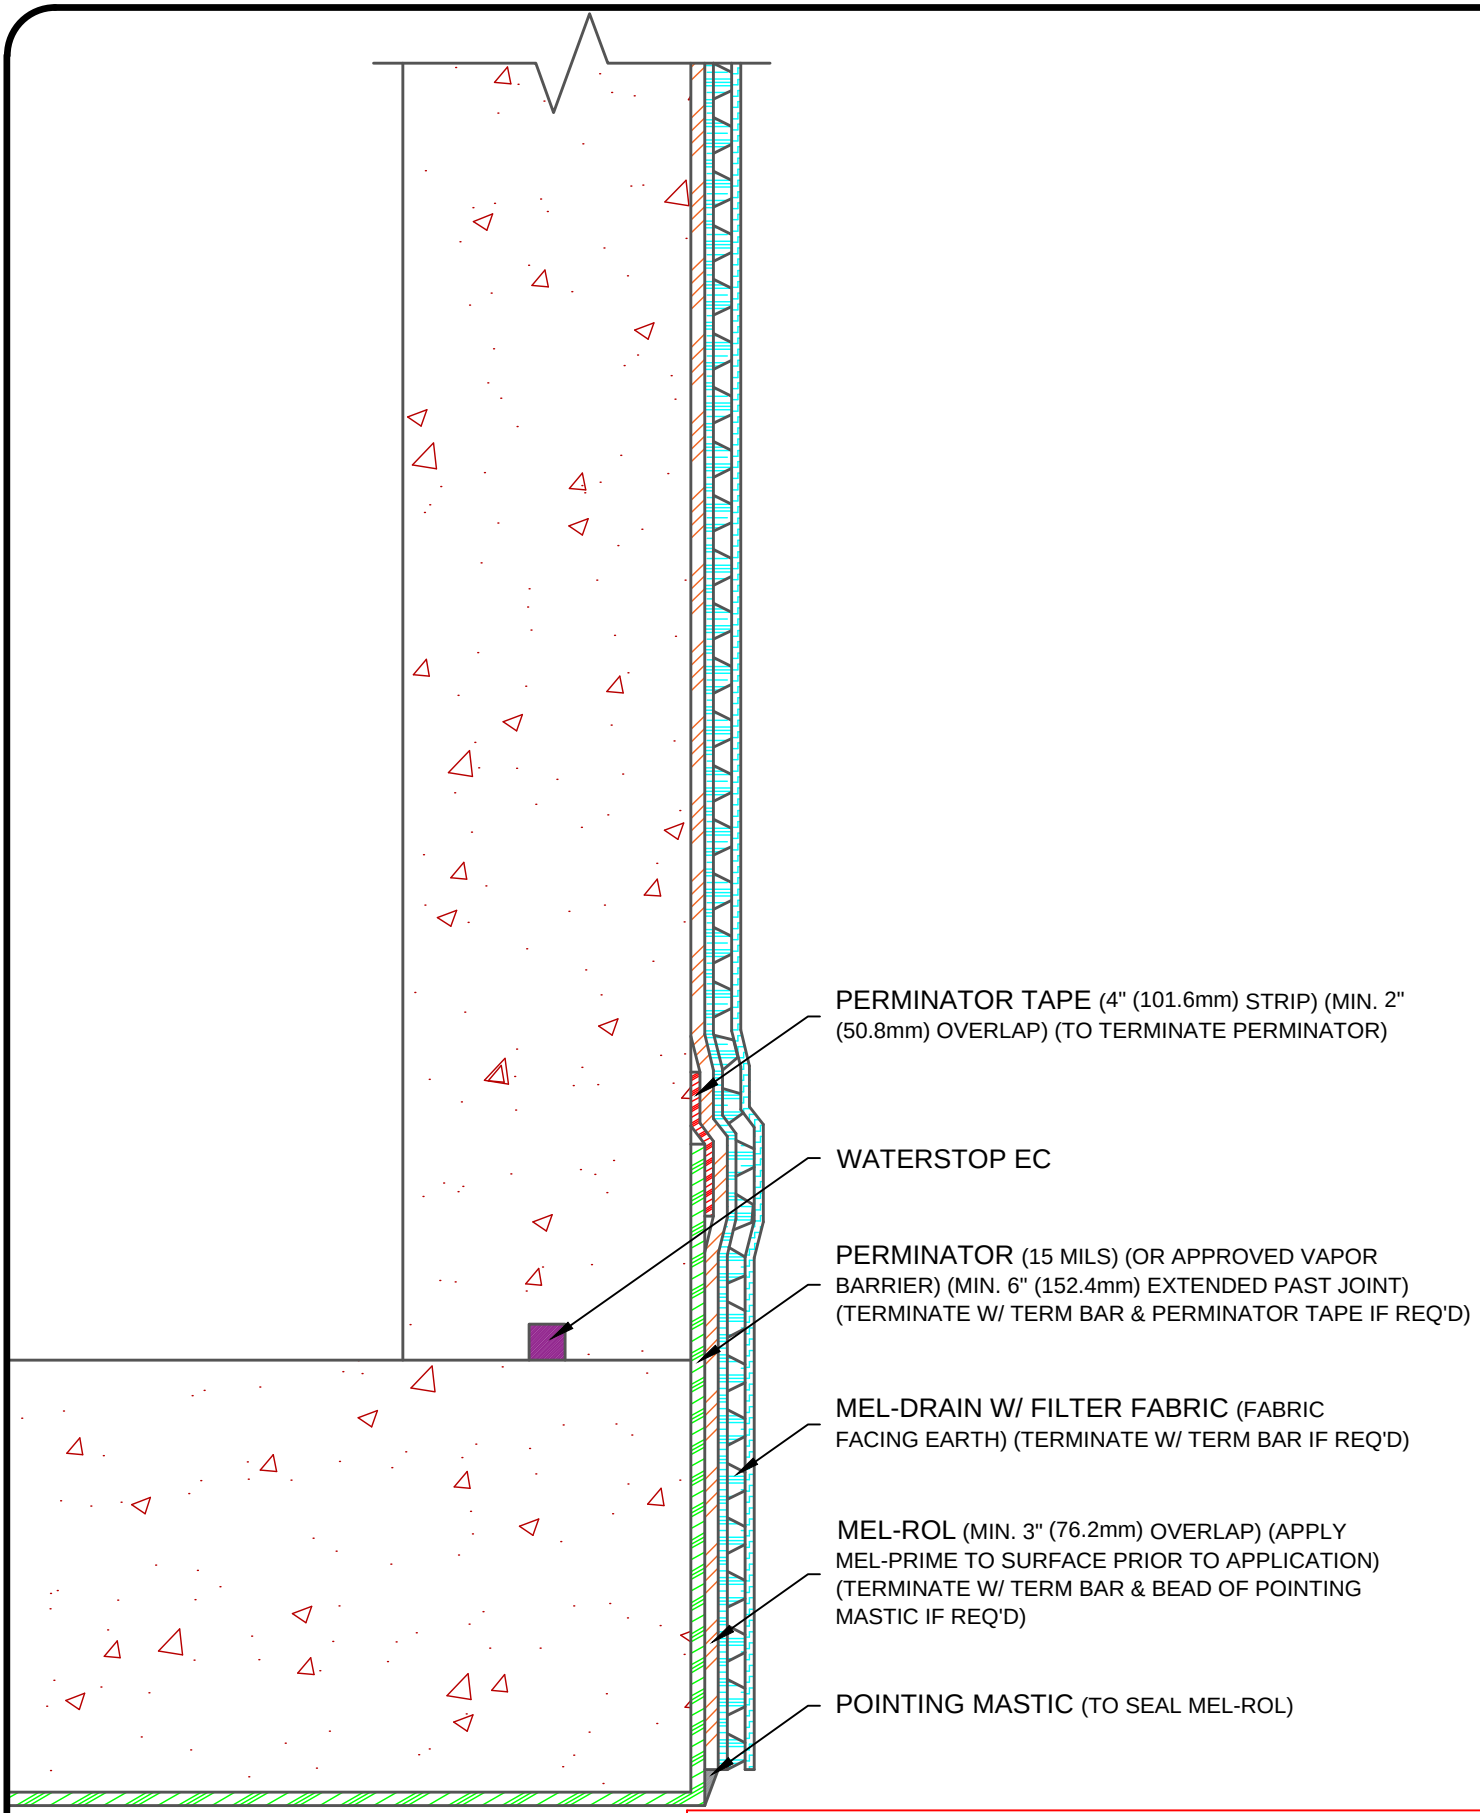


PERMINATOR TAPE (4" (101.6mm) STRIP) (MIN. 2" (50.8mm) OVERLAP) (TO TERMINATE PERMINATOR)

WATERSTOP EC

PERMINATOR (15 MILS) (OR APPROVED VAPOR BARRIER) (MIN. 6" (152.4mm) EXTENDED PAST JOINT) (TERMINATE W/ TERM BAR & PERMINATOR TAPE IF REQ'D)

MEL-DRAIN W/ FILTER FABRIC (FABRIC FACING EARTH) (TERMINATE W/ TERM BAR IF REQ'D)

MEL-ROL (MIN. 3" (76.2mm) OVERLAP) (APPLY MEL-PRIME TO SURFACE PRIOR TO APPLICATION) (TERMINATE W/ TERM BAR & BEAD OF POINTING MASTIC IF REQ'D)

POINTING MASTIC (TO SEAL MEL-ROL)

NOTE: DETAIL IS A GUIDE FOR INSTALLATIONS OF W. R. MEADOWS PRODUCTS ONLY. DETAIL MUST BE REVIEWED AND VERIFIED BY A DESIGN PROFESSIONAL FOR SUITABILITY ON THE PROJECT. W. R. MEADOWS DOES NOT ASSUME RESPONSIBILITY FOR ERRORS IN DESIGN OR ENGINEERING.

W. R. MEADOWS INC.
300 INDUSTRIAL DR.
HAMPSHIRE, IL 60140-0338
1-800-342-5976

TITLE:

PERMINATOR BASE OF WALL TRANSITION TO MEL-ROL (FLUSH WALL TO SLAB)

SCALE: NTS

DWG NO.: PERM-16

DATE: AUG 22, 2022