


W. R. MEADOWS®

SEALTIGHT®

FLOOR-TOP

STG Turn Your Old Tired Floor Into a New Work of Art

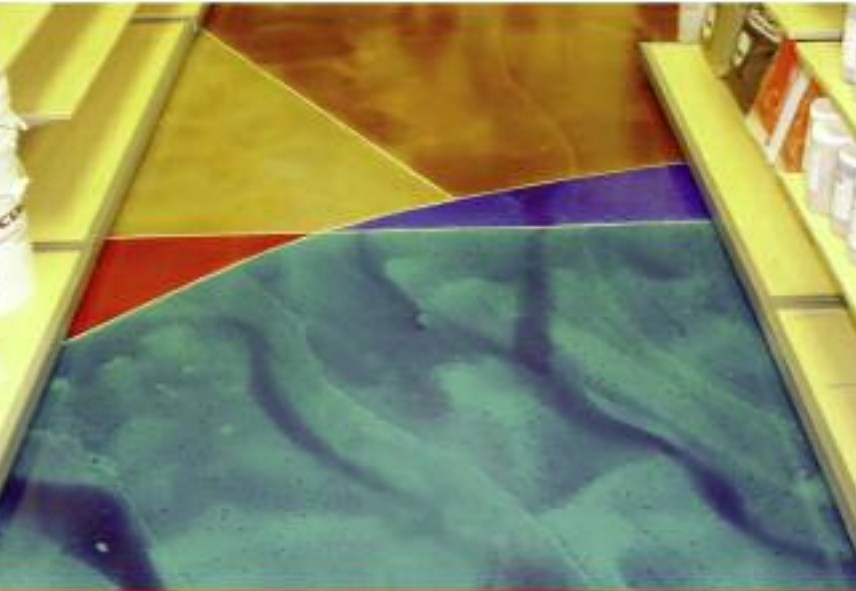

Whatever your needs...
we have the solution.



#BR-13

FLOOR-TOP STG

Turn your old floor into a new work of art with **FLOOR-TOP STG** from **W. R. MEADOWS**. **FLOOR-TOP STG** is a standard traffic-grade, single-component, shrinkage-compensated, self-leveling floor topping and premium underlayment that may be pumped or poured. **FLOOR-TOP STG** is specially designed to smooth out uneven, rough or minor deteriorated interior concrete floors.

This product is ideal for smoothing and leveling concrete and rigid-based interior substrates, either before the application of a floor covering, or as a finished floor. **FLOOR-TOP STG** cures to a hard, traffic-wearing surface suitable for foot and light rubber-wheeled traffic. **FLOOR-TOP STG** may be color enhanced with an inorganic liquid tint, topical coating or acid stain.

The light grey color of FLOOR-TOP is an ideal canvas for liquid tints, topical coatings, and acid stains or dyes. Create a finished, decorative floor that is only limited by your creativity. This ability to rehabilitate and also enhance the aesthetic look of the finished floor creates a one-two punch. Not only fix, but also make the floor look better than the original.



FLOOR-TOP STG makes your floor a new canvas for your art. Now get your creative juices flowing and create a masterpiece!



Features and Benefits

- Light grey color.
- May be applied up to 1" (25.4 mm) thick in a single application.
- Single-component; only requires addition of water.
- Superior flow – may be poured or pumped.
- Self-leveling properties reduce labor costs.
- Specialized polymer formulation readily accepts stains and color.
- Accepts early foot traffic (four hours).
- Floor covering may be installed in as little as 18 hours.
- May be used with radiant heating floor systems.

Application Made Easy

Installing **FLOOR-TOP STG** is easy. The product is self-leveling, so no labor intensive troweling is needed. Just prime the floor, then place **FLOOR-TOP STG** onto the substrate and screed with a gauge rack. On some floor substrates, an epoxy primer could be used to further aid in adhesion. **FLOOR-TOP STG** may be sanded to achieve the desired final appearance. Please read our data sheet, available at www.wrmeadows.com, for full application instructions.

A floor finished with **FLOOR-TOP STG** creates a rehabilitated, aesthetically pleasing surface.



Durability That Lasts

A floor finished with **FLOOR-TOP STG** looks great, and is only matched by its exceptional durability. You want this unique, restored, decorative floor to keep up, and with **FLOOR-TOP STG**, it will. This finished floor, once hardened, will be suitable for foot and light rubber-wheeled traffic. A residential and commercial interior application, where foot traffic is standard, is a perfect and safe application.

PRIMER APPLICATIONS

SUBSTRATES	FLOOR-TOP STG PRIMER	REZI-WELD- LV Sand Broadcast Method	REZI-WELD TYPE III DOT Sand Broadcast Method
Highly Porous Concrete		✓	✓
Non-Absorbent Concrete	✓	✓	✓
Exterior-Grade Wood Flooring	✓	✓	✓
Ceramic		✓	✓
Vinyl Composite Tile (VCT)		✓	✓
Cement Terrazzo		✓	✓
Steel			✓

Follow all recommendations as outlined on the technical data sheet and primer usage chart for FLOOR-TOP STG.

Visit Our Website for More Detailed Information

Our website features detailed information on **FLOOR-TOP STG**, including MSDS documents, technical data sheets and project profiles. We also include full details on our other restoration and decorative concrete products. You can also request our other brochures and catalogs.

Visit www.wrmeadows.com for more information.



FLOOR-TOP STG

Ideal applications:

- Residential and Commercial Applications
- Floor Rehab
- Walkways
- Concrete Floors
- Restaurants
- Galleries
- Museums
- Offices



If you need more information on our complete line of floor finishing products, here are four quick and easy access points:

- Visit our comprehensive website: www.wrmeadows.com
- Contact W. R. MEADOWS, INC. via email: info@wrmeadows.com
- Call toll free: 1-800-342-5976
- Fax: 1-847-683-4544



facebook.com/wrmeadows



twitter.com/wrmeadows



W. R. MEADOWS, INC.
 P.O. Box 338 • HAMPSHIRE, IL 60140-0338
 Phone: 847/214-2100 • Fax: 847/683-4544
 1-800-342-5976
www.wrmeadows.com

HAMPSHIRE, IL / CARTERSVILLE, GA / YORK, PA
 FORT WORTH, TX / BENICIA, CA / POMONA, CA
 GOODYEAR, AZ / MILTON, ON / ST. ALBERT, AB

Distributed by: