



DATA SHEET NO. 5754-000

**MEL-DRAIN™ TOTAL-DRAIN™
Rolled Matrix Drainage System**

DESCRIPTION

The MEL-DRAIN TOTAL-DRAIN sheet drain system combines any regular MEL-DRAIN sheet drain section with the unique TOTAL-DRAIN section. In the TOTAL-DRAIN system, the regular sheet drain performs its normal function of water collection, while the TOTAL-DRAIN section provides both water collection and a high-profile section for water flow to the designated drainage exits. TOTAL-DRAIN is a two-part, prefabricated geocomposite drain consisting of a formed 609.6 mm (24") high HIPS core covered on one side with a non-woven, needle-punched polypropylene filter fabric. The top section is 304.8 mm (12") of 11.1 mm (7/16") core for water collection. The bottom section is 304.8 mm (12") of 25.4 mm (1") thick for water collection and horizontal water flow to designated exits. The fabric allows water to pass into the drain core while restricting the movement of soil particles, which might clog the core. The core allows the water to flow to designated drainage exits. Full-coverage protection is provided to waterproofing materials.

USES

TOTAL-DRAIN works with any MEL-DRAIN drainage product.

FEATURES/BENEFITS

- The high-profile flow section has a larger open area than does perforated pipe to accept high flows from the sheet drain and from the surrounding soil.
- The TOTAL-DRAIN section, with its manufactured transition between sheet drain and high-profile section, provides a secure flow path, which is not dependent on field installation.
- The system is fast and easy to install. Eliminates select backfill required to give perforated pipe strength. Standard connectors and corner guards are available.


TECHNICAL DATA

Section Properties

Flow Capacity	
Sheet Drain, gpm/ft. of width	21 @ HG = 0.1
ASTM D 4716	
High Profile, gpm	100 @ HG = 1.0
ASTM D 4716	9,000
Compressive Strength, lb./sf	
ASTM D 1621	50
Roll Length, ft.	
Roll Width, ft.	2
Roll Weight, lb.	30

**MEL-DRAIN Rolled Matrix Drainage Installation
Instructions Using TOTAL-DRAIN or Pipe
REQUIRED MATERIALS**

1. 2' x 50' rolls of TOTAL-DRAIN sheet drain
2. 4' x 50' rolls of MEL-DRAIN rolled matrix drainage, if full wall drainage is required
3. TOTAL-DRAIN sheet drain corner guards
4. 4" (101.6 mm) wide PERMINATOR TAPE from W. R. MEADOWS.
5. Attachment materials (see below)
6. Knife or scissors, rubber hammer

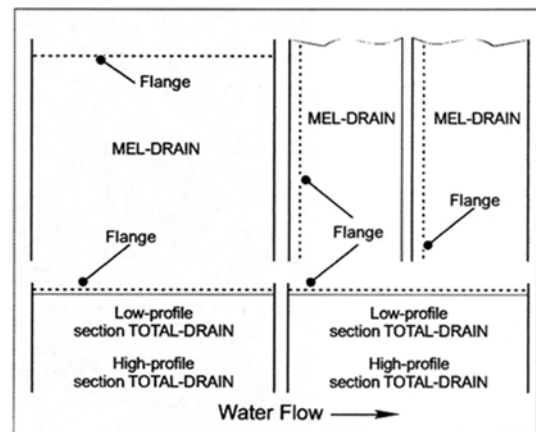

Continued over

W. R. MEADOWS® OF CANADA
 70 Hannant Court, Milton, ON L9T 5C1
 Phone: (905) 878-4122 • Fax: (905) 878-4125
 Montreal Sales: (877) 405-5186

Hampshire, IL/Cartersville, GA/York, PA/Fort Worth, TX
 Benicia, CA/Pomona, CA/Goodyear, AZ/Milton, ON
 St. Albert, AB
www.wrmeadows.com

Drain Attachment Methods ... For attaching drain to waterproofing material, concrete, or wood, several methods may be used, including metal stick pins, nails driven through washers or wood lathing, construction adhesives, or double-sided tape. Discuss material compatibility with waterproofing supplier before using adhesive. Typically, any method used for attaching waterproofing protection board will work for drain. For attaching drain to bare earth 101.6 – 203.2 mm (4" - 8"), anchor pins with washers work well.

Clean Wall/Waterproof/Insulate ... Clean wall and apply waterproofing or insulation if required.

Installing First Row ... If not using MEL-DRAIN rolled matrix drainage for full water coverage, close the top end of the drain to prevent soil intrusion by folding the fabric behind the drain. Close the high-profile section with PERMINATOR TAPE.

Going Around Corners ... Bend drain to make inside corners. For outside corners, cut the low-profile core flush with corner and tape edges. Slit fabric on high-profile section, bend around corner, and place corner guard with fabric over slit of high-profile drain. Secure with PERMINATOR TAPE.

Installing Next Roll of TOTAL-DRAIN ... To attach the next roll of TOTAL-DRAIN drain, cut one row of low-profile dimples from each end of the two sections to be joined. Do not cut fabric. Interlock one row of the high-profile section and secure connection. Overlap fabric and apply PERMINATOR TAPE from top to bottom of joint to prevent soil intrusion.

Connecting MEL-DRAIN Rolled Matrix Drainage to TOTAL-DRAIN ... If full wall drainage is required, attach MEL-DRAIN rolled matrix drainage above TOTAL-DRAIN sheet drain. MEL--DRAIN rolled matrix drainage may be installed either horizontally or vertically. When installed

vertically, the edge of the core with flange should be facing direction opposite of TOTAL-DRAIN water flow. Fold back fabric at top of TOTAL-DRAIN and rest (or shingle) MEL-DRAIN rolled matrix drainage on top of TOTAL-DRAIN core flange. Cover fabric seam (facing down) and secure with PERMINATOR TAPE.

MASTERFORMAT NUMBER AND TITLE

07 10 00 – Dampproofing and Waterproofing

LEED INFORMATION

May help contribute to LEED credits:

- EA Credit 1: Optimize Energy Performance
- IEQ Credit 3.1: Construction Indoor Air Quality Management Plan – During Construction
- IEQ Credit 7.1: Thermal Comfort – Design
- MR Credit 2: Construction Waste Management
- MR Credit 4: Recycled Content
- MR Credit 5: Regional Materials
- SS Credit 6.1: Storm Water Design: Quantity Control
- SS Credit 6.2: Storm Water Design: Quality Control
- WE Credit 1: Water-Efficient Landscaping
- WE Credit 2: Innovative Wastewater Technologies

For most recent data sheet, further LEED information, and MSDS, visit www.wrmeadows.com.

12/12/14



© SEALTIGHT is a registered trade mark of W. R. Meadows

WARRANTY: W. R. Meadows of Canada warrants that, at the time and place we make shipment, our materials will be of good quality and will conform with our published specifications in force on the date of acceptance of the order. THE FOREGOING WARRANTY SHALL BE EXCLUSIVE AND IN LIEU OF ANY OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND ALL OTHER WARRANTIES OTHERWISE ARISING BY OPERATION OF LAW, COURSE OF DEALING, CUSTOM OF TRADE OR OTHERWISE. As the exclusive remedy for breach of this Warranty, we will replace defective materials, provided, however, that the buyer examine the materials when received and promptly notify us in writing of any defect before the materials are used or incorporated into a structure. Three (3) months after W. R. Meadows of Canada has shipped the materials, all our Warranty and other duties with respect to the quality of the materials delivered shall conclusively be presumed to have been satisfied, all liability therefore terminates and no action for breach of any such duties may thereafter be commenced. W. R. Meadows of Canada shall in no event be liable for consequential damages. Unless otherwise agreed to in writing, no warranty is made with respect to materials not manufactured by W. R. Meadows of Canada. We cannot warrant or in any way guarantee any particular method of use or application or the performance of materials under any particular condition. Neither this Warranty nor our liability may be extended or amended by our salesmen, distributors or representatives, or by our distributor's representatives, or by any sales information or drawings.