WRM FIXED HEAD PEDESTALS

WRM Pedestals work perfectly with all deck pavers; including wood, porcelain, and concrete. They provide rigid support for pavers and can hold thousands of pounds each. The pedestals help conceal roof extrusions, like anchor points and pipes. WRM Pedestals allow our fastening kit to secure wood and porcelain pavers down to mitigate movement and wind uplift.

MATERIAL	Polypropylene and rubber (head top)
HEIGHT	1″ - 39″
BASE DIAMETER & THICKNESS	8″ x 1⁄16″
HEAD DIAMETER	7″
BASE CONTACT SURFACE AREA	49 in^2
TAB HEIGHT & THICKNESS	½″ x 5⁄32″
COMPRESSION STRENGTH	> 3,000 PSF
FIRE RATING	Class E (UNI EN 13501-1: 2009)
CHARACTERISTICS	Adjustable height Security lock to prevent unlocking Recyclable material
ACCOMPANYING GRT PRODUCTS	WRM Deck Tiles WRM Structural Grate WRM Concrete & 3 Pavers WRM Fastening Kits



Deck Paver Head: Heavy duty fixed head; Designed specifically to hold and align all deck pavers and tiles.

Adjustable Threaded Section: Allows you to adjust the height in minute increments, within the given range.

Height Extension Collar: A simple design with a single ‘click’ motion to attach these extension collars build up the pedestals to a maximum height of 39”.

Wide Supporting Base: Pedestals are loosely laid and do not require fixing to the floor. Large diameter spreads loads and ensures stability.

W. R. MEADOWS, INC.
P.O. Box 338 • Hampshire, IL 60140-0338
Phone: 847/214-2100 • Fax: 847/683-4544
1-800-342-5976
www.wrmeadows.com • info@wrmeadows.com

WRM PEDESTAL, TYP.

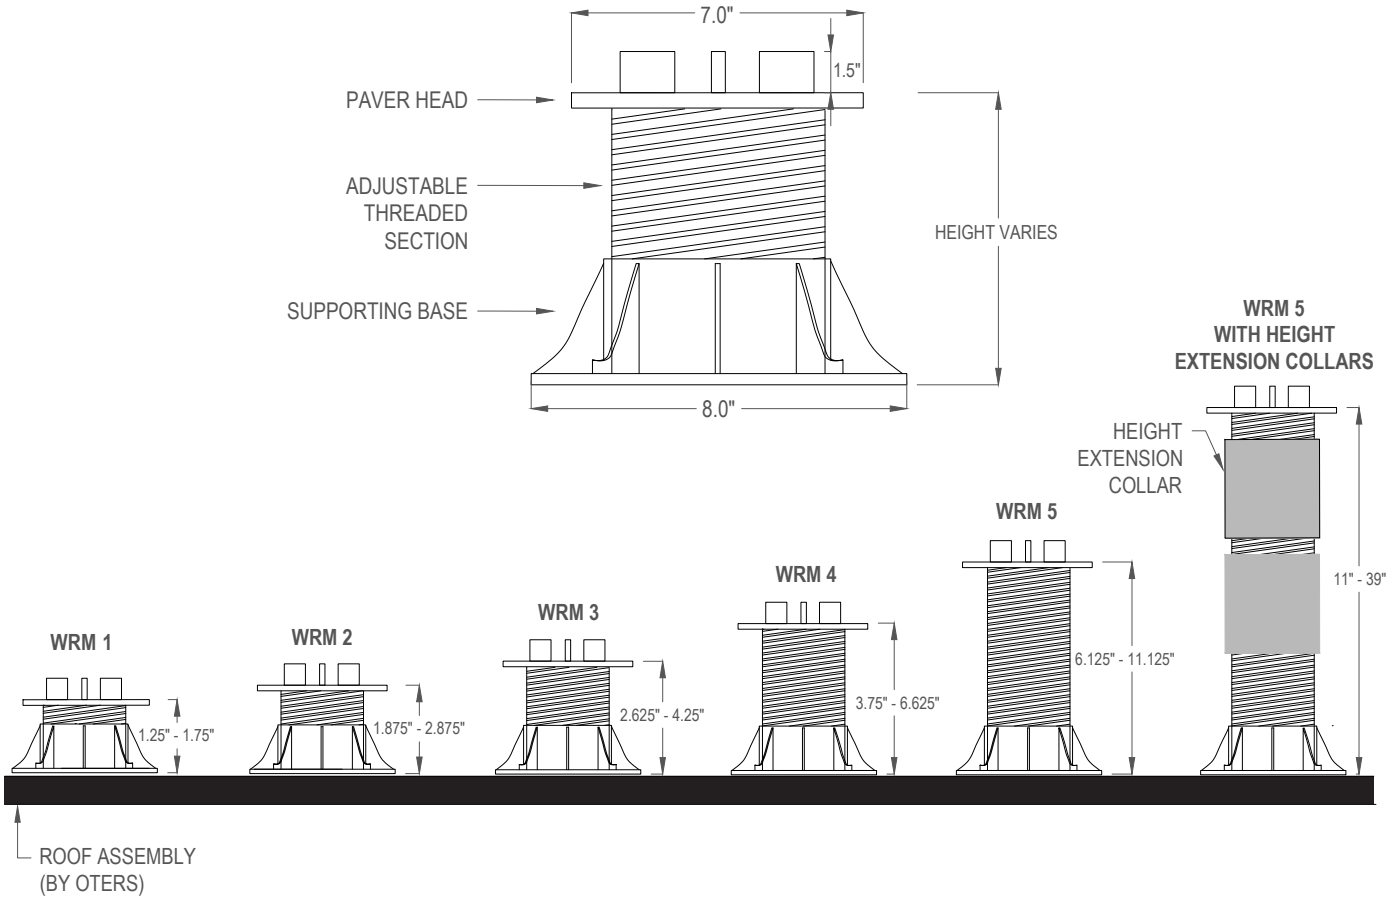

NOTES:

1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
2. DO NOT SCALE DRAWING.
3. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
4. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.