

HRM 714 (2ND LAYER 125MILS)


REINFORCING FABRIC HCR

HRM 714 (1ST LAYER 90 MILS) (APPLY TO PROPERLY PREPARED & PRIMED SUBSTRATE)

NEOPRENE FLASHING MEMBRANE (MIN. 8" (203.2mm) TURNED UP PENETRATION) (MIN. 3" (76.2mm) TURNED ONTO SLAB)

HRM 714 (125MILS DETAILING LAYER) (APPLY TO PROPERLY PREPARED & PRIMED SUBSTRATE)

PROTECTION COURSE OR MODIFIED ASPHALT

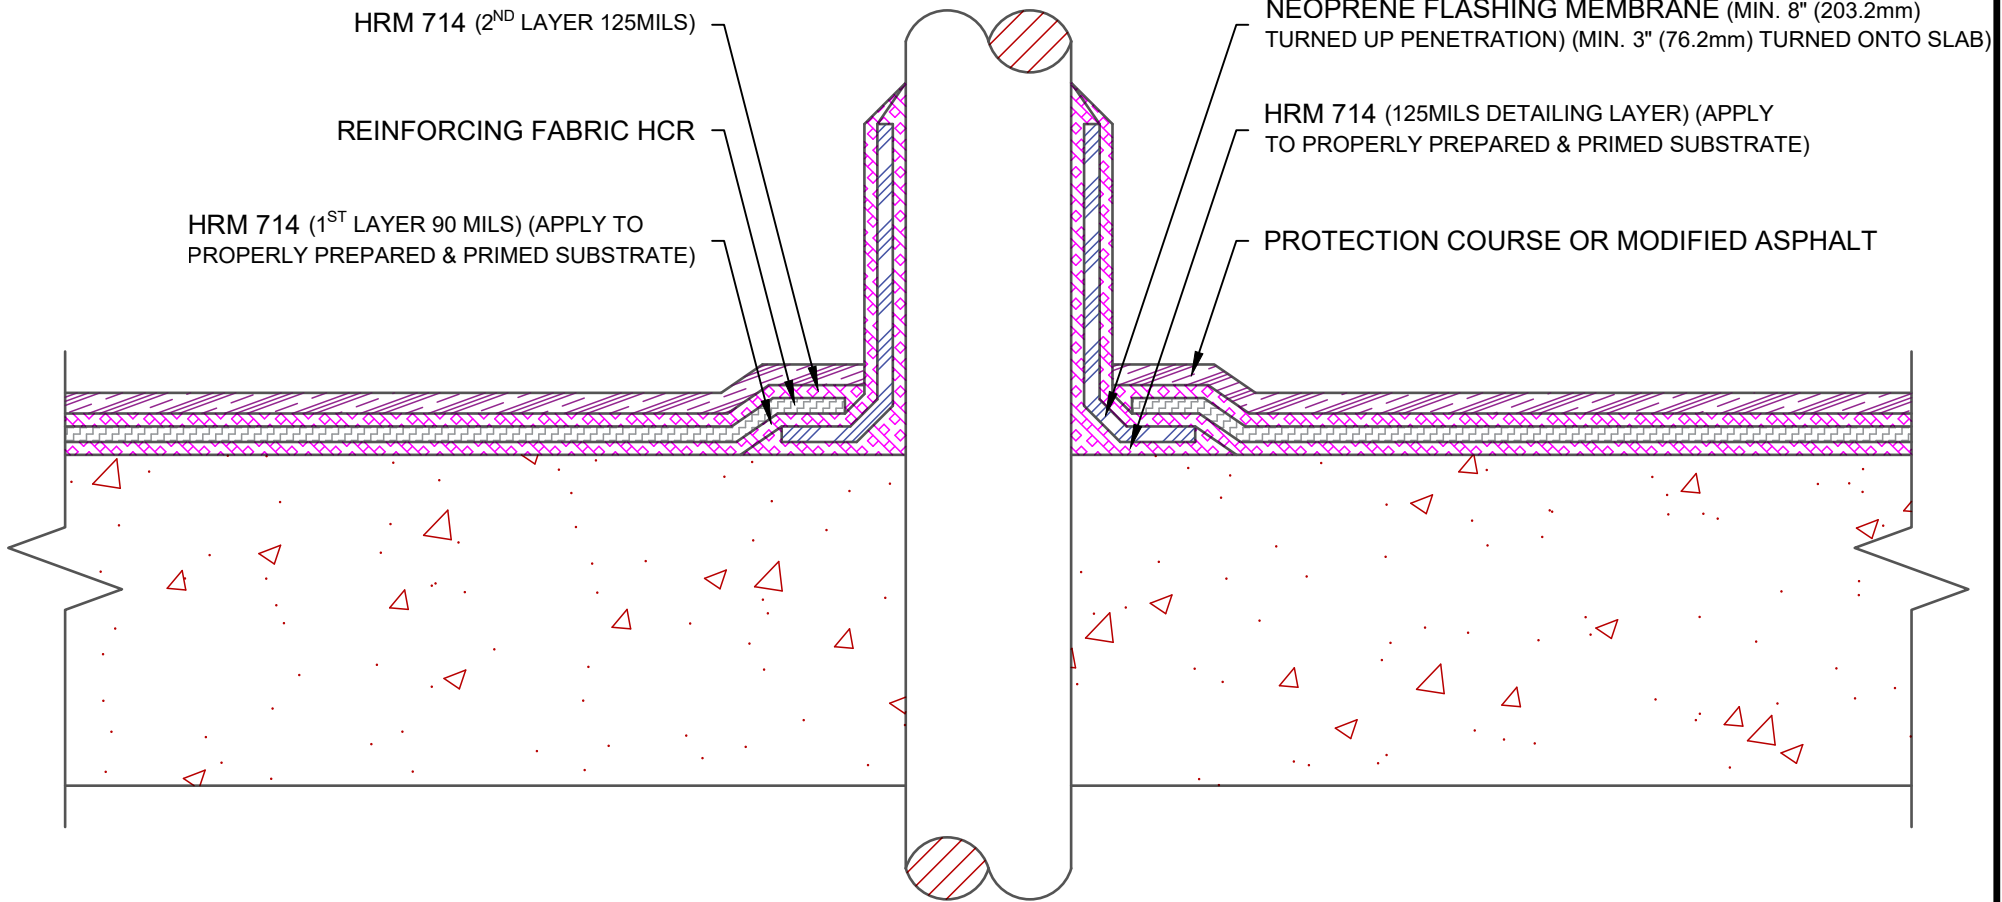

DETAILING NOTE:
 1) OPTIONAL USE OF STAINLESS STEEL BAND CLAMP AT THE TOP OF PIPE PENETRATION FLASHING IS SUGGESTED. APPLY BEAD OF BEM TO SEAL TERMINATED EDGE OF NEOPRENE FLASHING TO BAND CLAMP AND PIPE TOOL BEM TO FACILITATE RUN-OFF.
 2) IN LIEU OF NEOPRENE FLASHING AT PIPE PENETRATION, CERAMIC GRANULATED MODIFIED ASPHALT CAP SHEET CAN BE SUBSTITUTED. ALL OTHER DETAILING IS TO REMAIN THE SAME.

NOTE: DETAIL IS A GUIDE FOR INSTALLATIONS OF W. R. MEADOWS PRODUCTS ONLY. DETAIL MUST BE REVIEWED AND VERIFIED BY A DESIGN PROFESSIONAL FOR SUITABILITY ON THE PROJECT. W. R. MEADOWS DOES NOT ASSUME RESPONSIBILITY FOR ERRORS IN DESIGN OR ENGINEERING.